



TECHNICAL SPECIFICATION

MODEL NO.:APMS-200CAJ-700 DOCUMENT NO.:_____

CUSTOMER NO.:_____ DATA.:_____

CHANGZHOU AMCFLEX TECHNOLOGY CO LTD
ADD: NO8, HUASHAN ROAD, XINBEI AREA, CHANGZHOU, JIANGSU, CHINA
TEL: 0086 519 69682537 FAX: 0086 519 68693467
Email: info@amcflex.com www.amcflex.com

APMS-200CAJ-700 Series

200W output with current adjustable function



1. Constant Power Mode
2. Built-in Active PFC Function, High efficiency up to 93%
3. Protection: Over load/overvoltage/over temperature Short Circuit Protection
4. Output current support adjustable
5. Aluminum housing design with functional Ground
6. IP67 full sealed for indoor and outdoor installations
7. Low ripple, 100% flicker-free design
8. 5 Years warranty



TECHNICAL PARAMETERS

Model		APMS-200CAJ-700
OUTPUT	Output voltage range	143-286VDC
	Output Current range	700mA-1050mA
	Output Power	200W
	Open Circuit Voltage(Max)	310VDC
	Efficiency	≥93%
	Total Output Current Ripple (pk-pk)	5% Io Max
	Current Tolerance	±5.0%
	Startup overshoot current	10% Io Max, at 100% Load condition
	Line Regulation	±0.5%, @100% load
	Load Regulation	±0.3%
	Turn-on delay time	<2S
Efficiency	90%/120VAC, 92%/220VAC, 92.5%/277VAC, Measured at 100% load and steady-state temperature in 25 °C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)	


INPUT	Rated Input voltage	200-277VAC
	Input voltage range	180-305VAC
	Input Frequency	47-63(Typical 50/60)HZ
	Input Current Max	2.7A Max
	Inrush Current	4.61 A2s, At 220Vac input, 25 °C cold start, duration=244 μs, 10%Ipk-10%Ipk. See Inrush Current Waveform for the details.
	Power Factor	≥0.95 /230VAC; ≥0.92/277VAC @ full load
	THD	≤10% At 220-240Vac, 50-60Hz, 75%-100%load (112.5-150W)
	Leakage Current	<0.75mA/277VAC
	NO LOAD/Standby Power	<0.5W, 230VAC
PROTECTION	Short Circuit	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
	Over Load	Hiccup mode, auto-recovery after fault condition is removed
	Over Temperature	Hiccup mode, auto-recovery after temperature goes down
	Over Voltage	Shut-down output voltage, re-power on to recover
	Input under voltage protection	70V-90V, Turn off the output when the input voltage falls below protection voltage
ENVIRONMENT	Working Temperature	-40C°~+85C°(Typical 25C°), refer to derating curve
	Max Case Temperature	90C° Max
	Working Humidity	20-95% RH NO-condensing
	Storage Temp/Humidity	-40C°~+80C°, 10-90% RH
	Attitude	0 ~ 5000 M, Altitude Over 2000 meters, 1.5% derating for every 100 meters increase
	Temperature Coefficient	0.03%/C° (0-60C°)
	Vibration	10-500Hz, 5G 12min./1cycle, period for 72 min, each along X.Y. Z axes
OTHERS	MTBF	200Khours, MIL-HDBK-217F (25C°)
	Dimension	193.6(L)*66.2 (W)*40(H) mm
	Packing	0.8Kg;20pcs/ 17.5Kg/0.026CBM

SAFETY & EMC	Safety Standards	UL8750, IEC/EN61347-1, EN61347-2-13, EN62368, GB19510.1, GB19510.14, IP67 Approved
	Withstand Voltage	I/P-O/P: 3.75KVAC, I/P-FG: 1.5KVAC, O/P-FG: 500VAC
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC/25°C/70RH
	Storage Temp/Humidity	-40°C ~ +80°C, 10-90% RH
	EMI	
	Conducted	EN55015(CISPR15), GB17743
	Radiated	EN55015(CISPR15), GB17743
	Harmonic Current	EN61000-3-2, Class C @load ≥ 50%
	EMS	
	ESD	EN61000-4-2, 8KV air; Level 2, 4KV contact
	Radiated	EN61000-4-3
	EFT/Burst	EN61000-4-4
	Surge	EN61000-4-5, 4KV/Line-Line 6KV/Line-Earth
	Conducted	EN61000-4-6
	EN61547, Electromagnetic Immunity Requirements applies to lighting Equipment	

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Mechanical Mounting

DIMENSION	193.6 (L)*66.2 (W)*40 (H) mm		
Input Cable	AC/N(Blue) AC/L(Brown) FG(Green/Yellow)	VDE 17AWGx3C & 3x1.0mm ²	250±30mm Length
Output Cable	V+(RED)/Brown, V-(BLACK)/Blue	VDE 17AWGx2C & 2x1.0mm ²	250±30mm Length

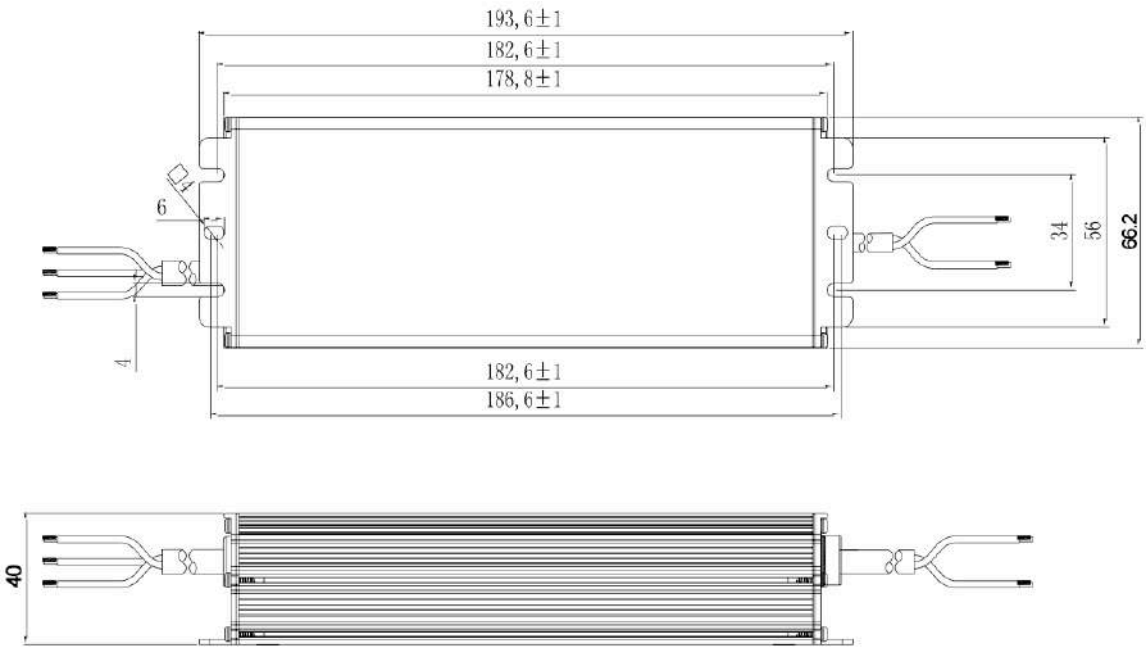


Characteristics & Derating


OUTPUT LOAD vs TEMPERATURE

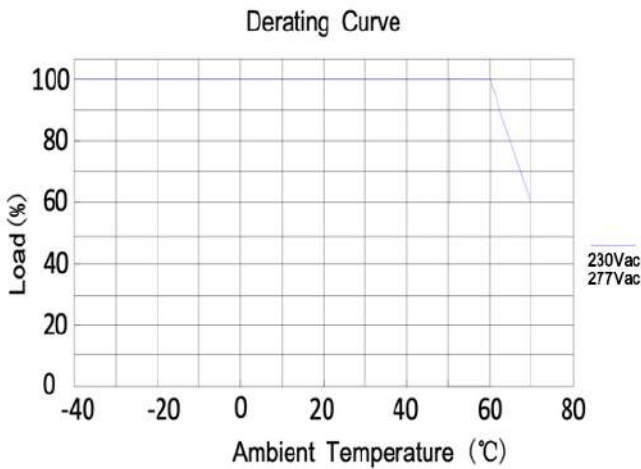


OUTPUT LOAD vs Tcase


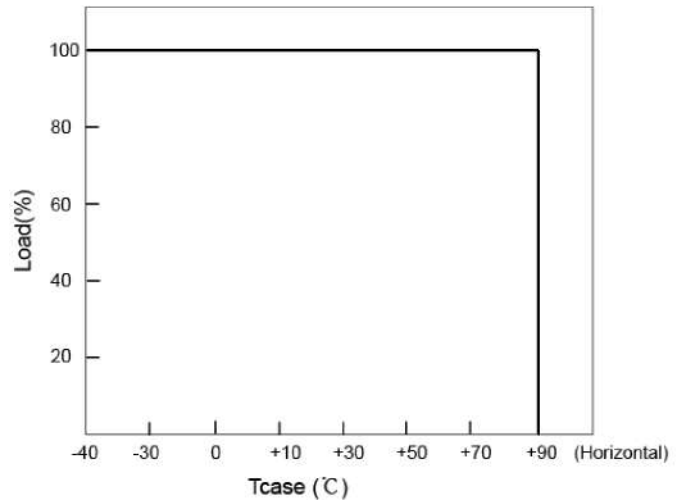


STATIC CHARACTERISTIC

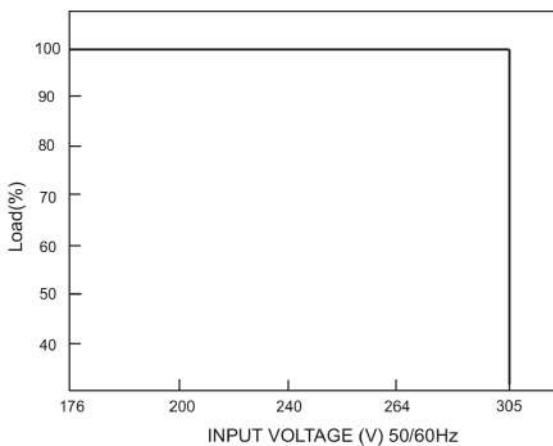

LIFE TIME

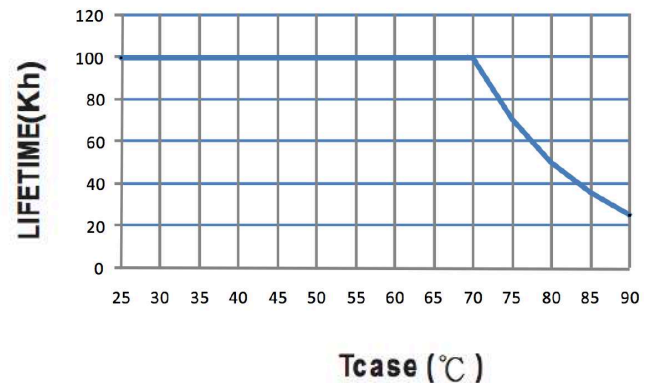


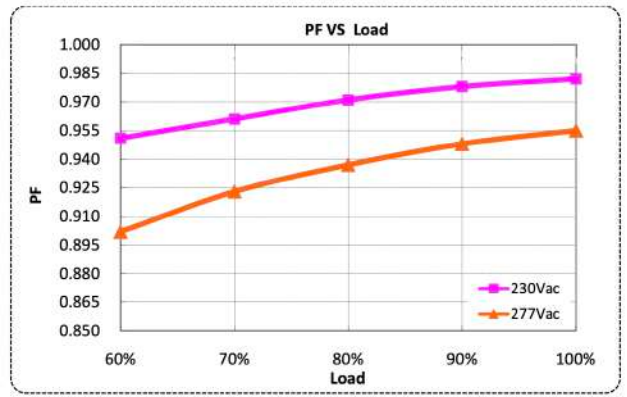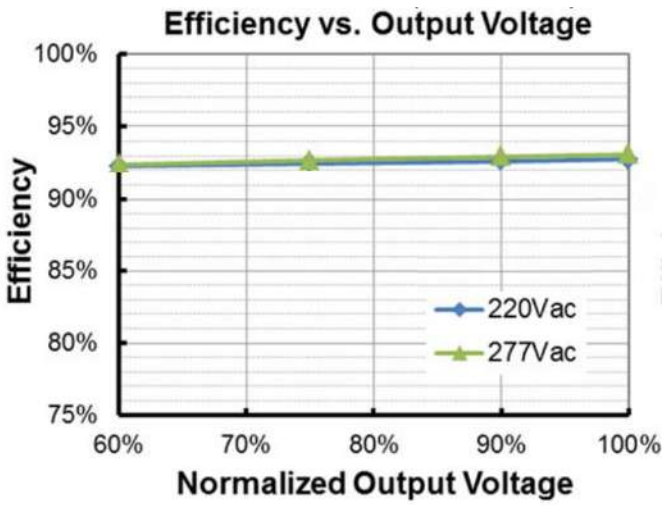



RoHS Compliance Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products

Operation Area

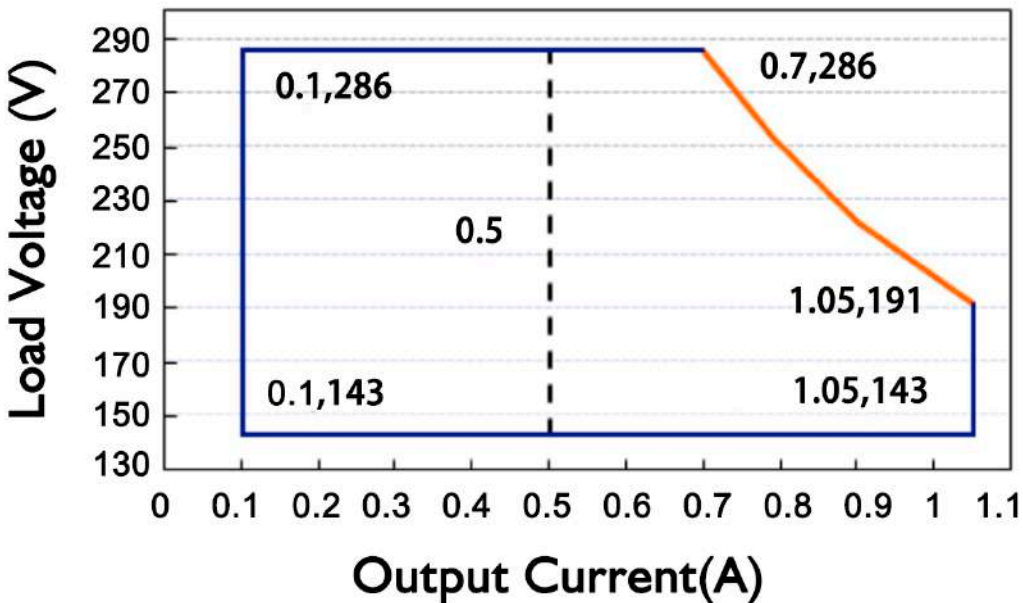Output Current VS Load Voltage Curge



PRODUCT LABEL

● AC/N(BLUE) ● AC/L(BROWN) ⊕ GND (GREEN/YELLOW)	INPUT	 APMS-200CAJ-700 CONSTANT CURRENT LED DRIVER	 Io ADJ Vo- (BLUE) Vo+ (BROWN)
		INPUT: 200-240V~50/60Hz, 2.7A max, $\lambda > 0.95$ 277V~ 50/60Hz, 0.95A max (277V~ For North American only) OUTPUT: 143-286V === 0.7A-1.05A Max: 310V === Max 200W 200-277V~ ta:60°C ,tc:90°C	

Installation Manuel & Caution

- (1). Before commencing any installation or maintenance work, please disconnect the power supply from the utility. Ensure that it cannot be re-connected inadvertently.
- (2). Keep proper ventilation around the unit and do not put any object on it. 15-20cm clearance must be kept when the adjacent device is a heat source
- (3). Operating under high ambient temperature may cause the internal component temperature and will require a de-rating in output load
- (4). Install in wet condition need use waterproof connectors, make sure there is no space between the unit and lighting fixtures.
- (5). Output current and output wattage must not exceed the rated values on the specifications
- (6). Wiring
 - Connect the ACL wire (Brown) of the LED power supply to Live (black or brown).
 - Connect the ACN wire (Blue) of the LED power supply to Neutral (white or blue)
- (7). Risk of electrical shock and energy hazard. All failure should be examined by a qualified technician. Please do not remove the case of the power supply by yourself!
- (8). Can't be installed under water or buried in soil directly
- (9). Please do not install LED power supplies in places with high ambient temperature or close to fire source
- (10). The FG (⊕) must be well connected to PE(protective earth)
- (11). If the external flexible cable or cord of this switching power supply is damaged, it shall be exclusively replaced by the manufacturer or similar qualified person in order to avoid a hazard.