



# TECHNICAL SPECIFICATION

MODEL NO.:APVM-60-24

DOCUMENT NO.:

CUSTOMER NO.:

DATA.:

CHANGZHOU AMCFLEX TECHNOLOGY CO LTD  
ADD: NO8, HUASHAN ROAD, XINBEI AREA, CHANGZHOU, JIANGSU, CHINA  
TEL: 0086 519 69682537 FAX: 0086 519 68693467  
Email: [info@amcflex.com](mailto:info@amcflex.com) [www.amcflex.com](http://www.amcflex.com)

# APVM-60-24

# IP67 Waterproof LED Power Supply



- ★ Constant Voltage + Constant Current Mode
- ★ 200-240VAC Input voltage, High efficiency up to 88%
- ★ Protection: Over Current/Short Circuit/Over voltage Over Temperature
- ★ Class II Power Unit, NO FG
- ★ IP67 waterproof full sealed with Plastic Housing
- ★ Compliance to ERP SELV EMC LVD requirement
- ★ 50,000Hours long life span, low temperature rise







 IP67 ROHS

## TECHNICAL PARAMETERS

### 1. Output

Items	Specs	Unit	Conditions
Rated Output voltage	24	VDC	Ta , rated input voltage, output with rated power
Rated Output Current	2.5	A	Ta ,rated input voltage
Rated Output Power	60	W	Ta , rated input voltage
Tcase Max	85	C°	Ta: 40C° ,230VAC,full load
Efficiency	≥88 (Typical 89)	%	25°C,rated input voltage, output with max. rated power
Line Regulation	±1.0	%	/
Load Regulation	±2.0	%	/
Voltage tolerance	±3.5	%	/
Ripple & Noise (max)	≤120	mVp-p	Measured at 20MHZ of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47 uf parallel capacitor
Setup, Rise time	688ms, 20ms	mS	25C° , full load
Switch off Hold Up time	18	ms	230VAC, full load

## 2. Input

Items	Specs	Unit	Conditions
Rated Input voltage	200-240	VAC	25°C
Input voltage range	180-264	VAC	25°C
Input Frequency	47-63(Typical 50/60)	Hz	25°C
Input Current Max	<1.0	A	Vin=180Vac, Full Load
Inrush Current	≤60	A	220Vac, full load, 25C°
Leakage Current	<0.25	mA	240VAC

## 3. Protection

Current Limiting	1.1-1.4 times of rated output current		Constant current limiting, Auto-recovery after fault condition is removed
Over Voltage	26-28	V	Voltage Limiting, Auto-recovery after fault condition is removed
Over Temperature	Yes	C°	Shut down output voltage, Auto-recovery after fault condition is removed
Short circuit	Yes		Hiccup Mode, Auto-recovery after fault condition is removed

## 4. Temperature and others


Operating Temperature range	-30 to +70 (Typical25)	C°	Refer to Derating Curve
Storage Temperature range	-40 to +80 (Typical25)	C°	
Humidity	10 ~ 95	%	NON-Condensing
Max Case Temperature	85	C°	40C° ambient temperature, full load
Waterproof Level	IP67 full sealed with silicon gel		
Cooling method	Air convection		
Temperature Coefficient	0.03%/C° (0-60C° )		
Vibration	10-500Hz, 5G 12min./1cycle, period for 72 min, each along X.Y. Z axes		
Lifespan	50,000hours, Max.Ta, rated input voltage, max rated output power		
Dimension/Packing	148*40*32mm (L*W*H) , 0.36Kg; 32pcs/12.5Kg/0.033CBM		

## 5. Safety & EMC Standards

Safety	U8750, EN60950-1, EN 62368-1
Withstand Voltage	I/P-O/P:3.0KVAC
Isolation Resistance	I/P-O/P:>100M Ohms / 500VDC /25C°/70% RH
EMI Conduction	Compliance to EN55015, EN55032 (CISPR22) Class B
EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55032, EN61547, light industry level , criteria A
Temperature Coefficient	0.03%/C° (0-60C° )
Vibration	10-500Hz, 5G 12min./1cycle, period for 72 min, each along X.Y. Z axes


## 6. Mechanical Mounting

Case Material	Pure PC, Fire-proof level V0
Mounting ways	Striped
Insulation type	Class II, NO FG
IP grade	IP67
Input cables dimension	H05RN-F 2X0.75mm <sup>2</sup> , 280±20mm, AC/N-Blue, AC/L-Brown
output cables dimension	H05RN-F 2X0.75mm <sup>2</sup> , 280±20mm,V+: Red, V-:Black
Dimension	148*40*32mm (L*W*H)

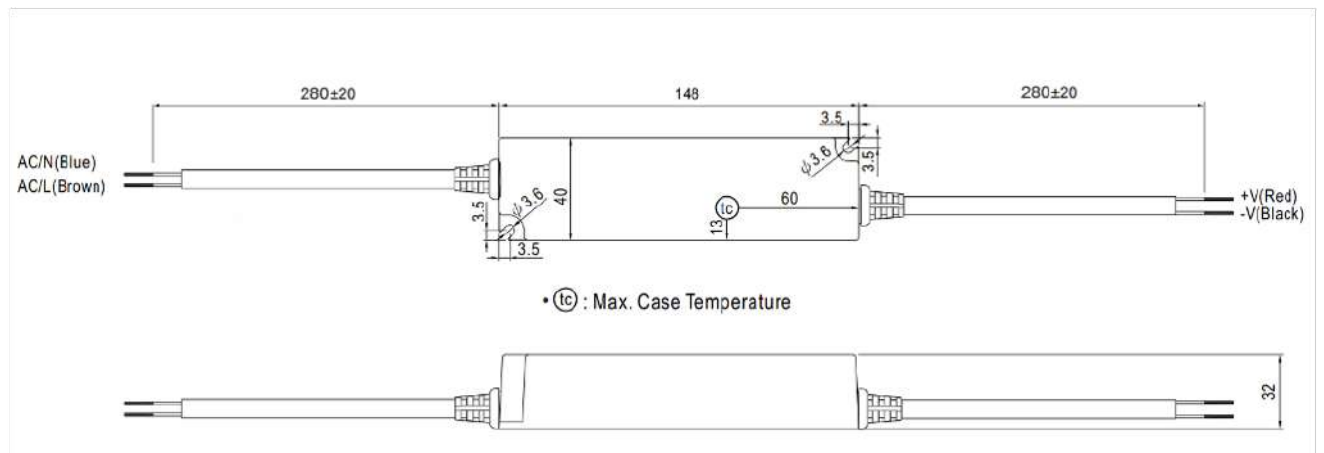


# 7. Characteristics & Derating


OUTPUT LOAD vs TEMPERATURE

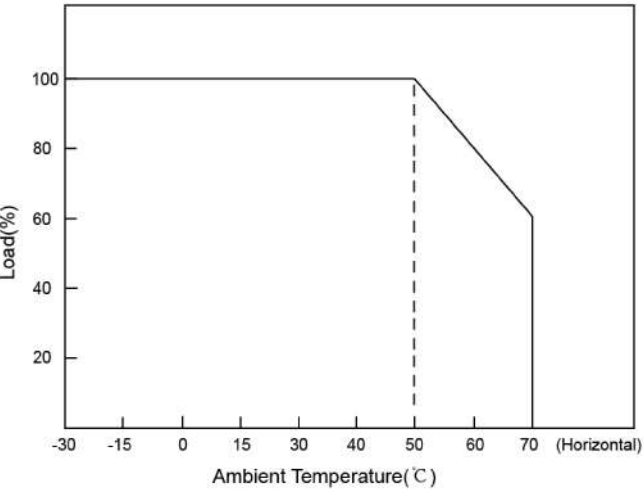

STATIC CHARACTERISTIC

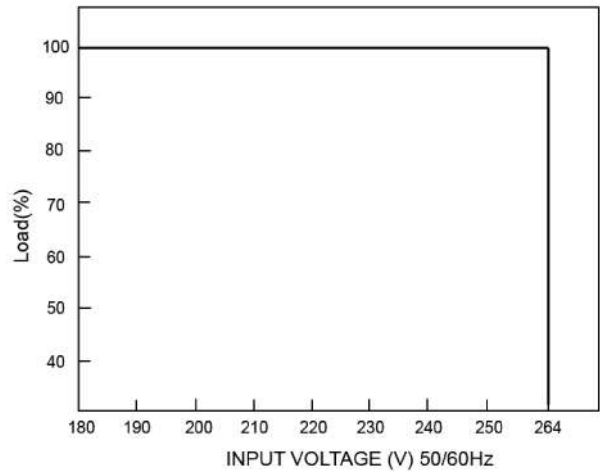


# 8. Block Diagram

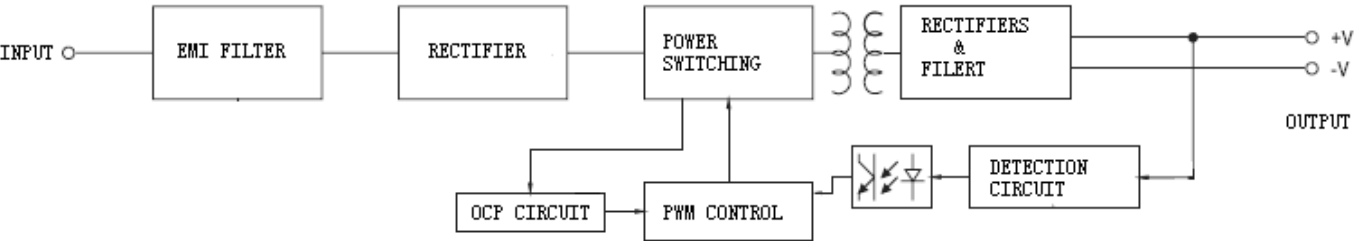

# 9. Product Label

<ul style="list-style-type: none"><li>● AC/N(BLUE)</li><li>● AC/L(BROWN)</li></ul>	<p><b>AMC FLEX</b> YOUR IDEA, WE MAKE IT</p> <p><b>CE</b> ROHS IP67</p> <p><b>SELV</b></p>	<p><b>APVM-60-24</b> Class 2 Power Supply</p> <p>PRI: 200-240VAC, 1.0A Max, 50/60Hz, SEC: +24V = 2.5A</p> <p>Rated Output Power: <b>60W</b> Max</p> <p>Constant Voltage + Constant Current Mode</p> <p>ta: 50°C, tc: 85°C Max      <b>MADE IN CHINA</b></p>	<p><b>Vo-</b> (BLACK)</p> <p><b>Vo+</b> (RED)</p>
--	--	---	---

## 10. Drive Mode

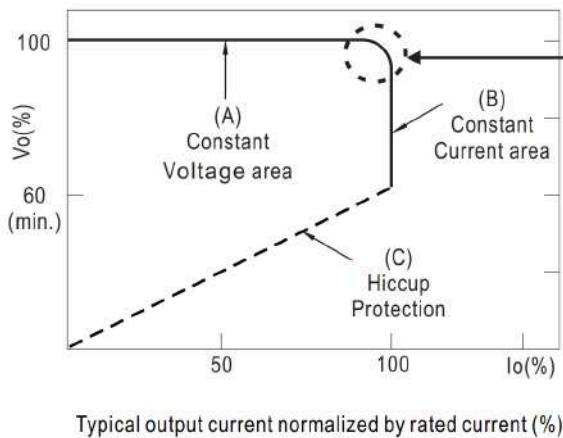

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

## 11. Installation Manual

- (1). Before commencing any installation or maintenance work, please disconnect the power supply from the utility. Ensure that it cannot be re-connected inadvertently.
- (2). Keep proper ventilation around the unit and do not put any object on it. 15-20cm clearance must be kept when the adjacent device is a heat source
- (3). Operating under high ambient temperature may cause the internal component temperature and will require a de-rating in output load
- (4). Install in wet condition need use waterproof connectors, make sure there is no space between the unit and lighting fixtures.
- (5). Output current and output wattage must not exceed the rated values on the specifications
- (6). Wiring
  - Connect the ACL wire (Brown) of the LED power supply to Live (black or brown).
  - Connect the ACN wire (Blue) of the LED power supply to Neutral (white or blue)
- (7). Risk of electrical shock and energy hazard. All failure should be examined by a qualified technician. Please do not remove the case of the power supply by yourself!
- (8). Can't be installed under water or buried in soil directly
- (9). Please do not install LED power supplies in places with high ambient temperature or close to fire source
- (10). If the external flexible cable or cord of this switching power supply is damaged, it shall be exclusively replaced by the manufacturer or similar qualified person in order to avoid a hazard.
- (11). DO NOT SOAK the power supply under water.